

ND9010w

☀ 10 inch ☀ 350 Watts
☀ 96 dB ☀ 62 ~ 3500 Hz



KEY FEATURES:

- ① 700 W continuous program power capacity
- ② Sensitivity: 96dB 1w/1m
- ③ 76mm(3") aluminum voice coil wounded on Kapton former
- ④ Vented on former, dual-forced air ventilation magnet system for heat dispersion and minimum power compression
- ⑤ FEA optimized neodymium magnet assembly allows the highest force factor and excursion capability
- ⑥ Optimized for the use in line array systems or compact bass reflex enclosure

GENERAL SPECIFICATIONS

Nominal Diameter	250mm /10inch
Rated Impedance	8 ohm
Nominal Power handling ¹	350 Watts
Program Power ²	700 Watts
Sensitivity(1w/1m) ³	96 dB
Frequency Range ⁴	62 ~ 3500Hz
Minimum Impedance(Zmin)	7.8 ohm
Voice Coil Diameter	76mm /3inch
Voice Coil Material	Aluminum
Former Material	Polyimide
Voice Coil Winding Depth	17.5 mm
Number of layers	2
Magnet gap depth	10 mm
Basket	Cast Aluminum
Flux Density	1.2 T
Magnet Material	Neodymium



THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	64 Hz
DC resistance	Re	5.6 ohm
Mechanical factor	Qms	11
Electrical factor	Qes	0.3
Total factor	Qts	0.29
Mechanical compliance	Cms	0.15 mm/N
Mechanical resistance of total-driver losses	Rms	1.5 kg/s
Effective Moving Mass	Mms	43 g
Half-space efficiency	Eff	2.1%
BL Factor	BL	18 T.m
Equivalent Cas air load	Vas	28 liters
Effective piston area	Sd	0.0353 m ²
Max. linear excursion ⁶	Xmax	±6.5mm
Max. excursion before damage	Xdam	±15 mm
Voice coil inductance(1kHz)	Le	0.9 mH
Efficiency Bandwidth Product	EBP	213

MOUNTING INFORMATION

Overall Diameter	261 mm
Bolt Circle Diameter	246 mm
Bolt Hole Diameter	5.5 mm
Baffle Cutout Diameter	228 mm
Overall Depth	121 mm
Air volume occupied by driver	1.7 liters
Net Weight	3.7 kg
Shipping Weight	4.2 kg
Shipping Box	295x295x155mm

Also available in 16ohm, data upon request.

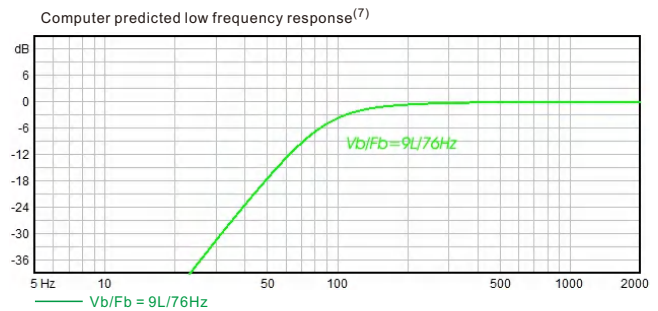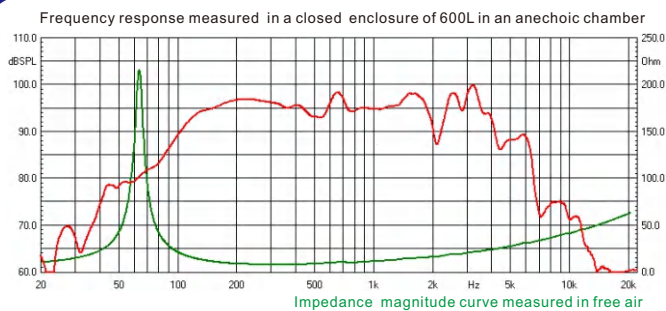

- NOTES:**
1. AES standard
 2. Program Power is defined as 3 dB greater than the nominal power handling.
 3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
 4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
 5. T/S parameters measured with laser system BEFORE preconditioning test.
 6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
 7. Vb: Net internal volume of box after subtracting the volume of internal objects.