

CI5-400

VERIFIED WITH
KLIPPEL

☀️ 15 inch ☀️ 400 Watts
☀️ 97 dB ☀️ 38 ~ 3000 Hz



KEY FEATURES:

- ① 800 W continuous program power capacity
- ② Sensitivity: 97dB 1w/1m
- ③ 76mm(3") inside/outside voice coil with SV-W wire
- ④ Vented back plate increases airflow to provide enhanced cooling
- ⑤ Treated cone for water protection
- ⑥ Ideal for compact 2 or 3-way systems

GENERAL SPECIFICATIONS



Nominal Diameter	380mm /15inch
Rated Impedance	8 ohm
Nominal Power handling ¹	400 Watts
Program Power ²	800 Watts
Sensitivity(1w/1m) ³	97 dB
Frequency Range ⁴	38 ~ 3000Hz
Minimum Impedance(Zmin)	6.7 ohm
Voice Coil Diameter	76mm /3inch
Voice Coil Material	SV-W(Copper)
Former Material	Glass Fiber
Voice Coil Winding Depth	17.5 mm
Number of layers	2(inside/outside)
Magnet gap depth	9.5 mm
Basket	Cast Aluminum
Flux Density	1.15 T
Magnet Out Diameter/Wgt	190mm / 78 oz

THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	38 Hz
DC resistance	Re	5.6 ohm
Mechanical factor	Qms	15
Electrical factor	Qes	0.37
Total factor	Qts	0.36
Mechanical compliance	Cms	0.17 mm/N
Mechanical resistance of total-driver losses	Rms	1.63 kg/s
Effective Moving Mass	Mms	102 g
Half-space efficiency	Eff	2.6%
BL Factor	BL	19.4 T.m
Equivalent Cas air load	Vas	177 liters
Effective piston area	Sd	0.0855 m ²
Max. linear excursion ⁶	Xmax	± 6.5mm
Max. excursion before damage	Xdam	± 19 mm
Voice coil inductance(1kHz)	Le	1.4 mH
Efficiency Bandwidth Product	EBP	103

MOUNTING INFORMATION

Overall Diameter	393 mm
Bolt Circle Diameter	375 mm
Bolt Hole Diameter	6.5 mm
Baffle Cutout Diameter	355 mm
Overall Depth	167 mm
Air volume occupied by driver	5 liters
Net Weight	7.3 kg
Shipping Weight	8.4 kg
Shipping Box	430x430x205 mm

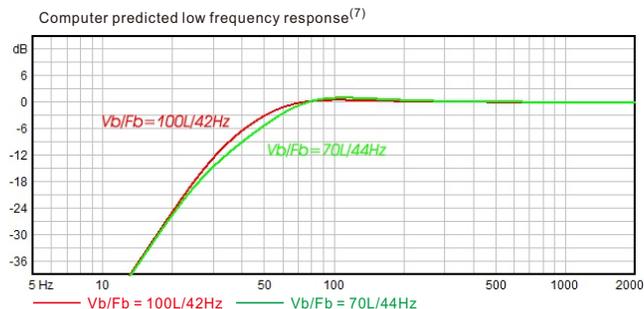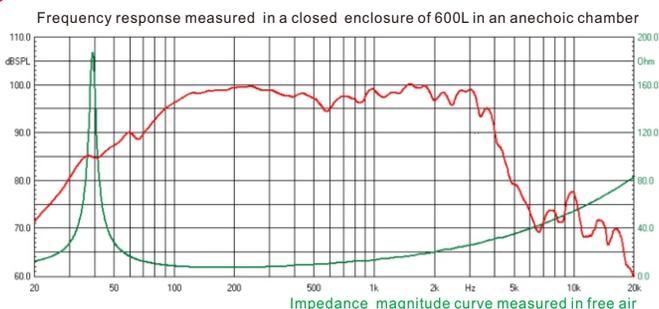

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. Thiele-Small parameters are measured with Klippel DA LPM module after an AES power preconditioning test and represent the expected long term parameters after a short term of use.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2 + Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
7. Vb: Net internal volume of box after subtracting the volume of internal objects.