

FC422

VERIFIED WITH
KLIPPEL

☀️ 4 inch ☀️ 40 Watts
☀️ 89.5 dB ☀️ 134 ~ 17k Hz



KEY FEATURES:

- ① 80W continuous program power capacity
- ② 89.5dB sensitivity, 1w/1m
- ③ 20mm(0.8") high temperature CCAW voice coil
- ④ Vented voice coil former increases airflow to provide enhanced cooling
- ⑤ Shorting copper ring for extended HF response
- ⑥ Y35 Strontium ferrite magnet
- ⑦ Strong and light fiberglass cone with polycotton edge remains rigid to higher frequencies
- ⑧ Ideal for mini array systems, full range application

GENERAL SPECIFICATIONS



Nominal Diameter	100mm /4inch
Rated Impedance	8 ohm
Nominal Power handling ¹	40 Watts
Program Power ²	80 Watts
Sensitivity(1w/1m) ³	89.5 dB
Frequency Range ⁴	134 ~ 17k Hz
Minimum Impedance(Zmin)	7.1 ohm
Voice Coil Diameter	20mm /0.8inch
Voice Coil Material	CCAWE
Former Material	Glass Fiber
Voice Coil Winding Depth	6 mm
Number of layers	2
Magnet gap depth	4 mm
Basket	Pressed Steel
Flux Density	1.2 T
Magnet Out Diameter/Wgt	70mm / 8 oz

THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	134 Hz
DC resistance	Re	6.4 ohm
Mechanical factor	Qms	6.5
Electrical factor	Qes	1.27
Total factor	Qts	1.06
Mechanical compliance	Cms	0.4 mm/N
Mechanical resistance of total-driver losses	Rms	0.46 kg/s
Effective Moving Mass	Mms	3.5 g
Half-space efficiency	Eff	0.29%
BL Factor	BL	3.9 T.m
Equivalent Cas air load	Vas	1.6 liters
Effective piston area	Sd	0.0053 m ²
Max. linear excursion ⁶	Xmax	± 2 mm
Max. excursion before damage	Xdam	± 5.5mm
Voice coil inductance(1kHz)	Le	0.08 mH
Efficiency Bandwidth Product	EBP	105

MOUNTING INFORMATION

Overall Diameter	127 mm
Bolt Circle Diameter	115 mm
Bolt Hole Diameter	5 mm
Baffle Cutout Diameter	103 mm
Overall Depth	55 mm
Air volume occupied by driver	0.17 liters
Net Weight	0.5 kg / pc
Shipping Weight	14 kg / 24pcs
Shipping Box	430*340*225mm

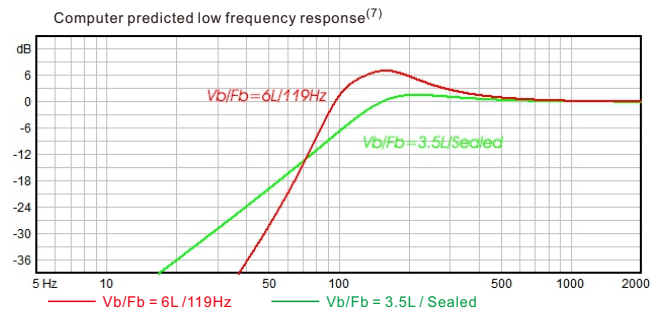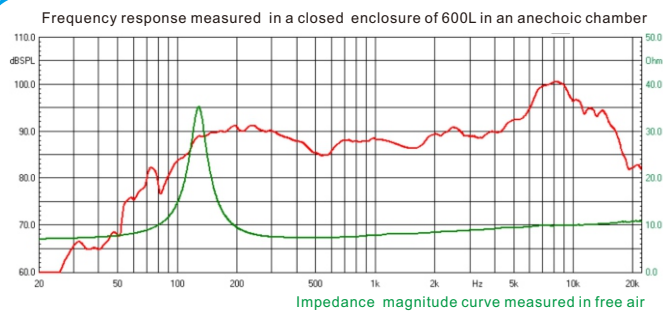

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. Thiele-Small parameters are measured with Klippel DA LPM module after an AES power preconditioning test and represent the expected long term parameters after a short term of use.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
7. Vb: Net internal volume of box after subtracting the volume of internal objects.