

FR321

- 3 inch**
- 40 Watts**
- 88 dB**
- 110 ~ 15k Hz**



KEY FEATURES:

- ① 80W continuous program power capacity
- ② 88dB sensitivity, 1w/1m
- ③ 20mm(0.8") high temperature copper clad aluminum voice coil
- ④ Vented voice coil former increases airflow to provide enhanced cooling
- ⑤ Shorting copper ring for extended HF response
- ⑥ Strong and light fiberglass cone remains rigid to higher frequencies
- ⑦ Ideal for compact array systems

GENERAL SPECIFICATIONS



Nominal Diameter	80mm /3inch
Rated Impedance	8 ohm
Nominal Power handling ¹	40 Watts
Program Power ²	80 Watts
Sensitivity(1w/1m) ³	88 dB
Frequency Range ⁴	110 ~ 15k Hz
Minimum Impedance(Zmin)	7.3 ohm
Voice Coil Diameter	20mm /0.8inch
Voice Coil Material	CCAW
Former Material	Glass Fiber
Voice Coil Winding Depth	6 mm
Number of layers	2
Magnet gap depth	4 mm
Basket	Pressed Cast
Flux Density	1.2T
Magnet Outer Diameter / Wgt	70mm / 8 oz

THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	113 Hz
DC resistance	Re	6.4 ohm
Mechanical factor	Qms	3.5
Electrical factor	Qes	0.85
Total factor	Qts	0.68
Mechanical compliance of suspension losses	Cms	0.67 mm/N
Effective Moving Mass	Mms	2.9 g
Half-space efficiency	Eff	0.17%
BL Factor	BL	4 T.m
Equivalent Cas air load	Vas	1.03 liters
Effective piston area	Sd	0.0033 m ²
Max. linear excursion ⁶	Xmax	2 mm
Voice coil inductance	Le1K	0.1 mH
Efficiency Bandwidth Product	EBP	133

MOUNTING INFORMATION

Overall Diameter	93 mm
Bolt Circle Diameter	84 mm
Bolt Hole Diameter	5 mm
Baffle Cutout Diameter	71 mm
Overall Depth	51 mm
Net Weight(1pc)	0.48 kg
Shipping Weight(32pcs)	17 kg
Shipping Box(32pcs)	400*400*145m

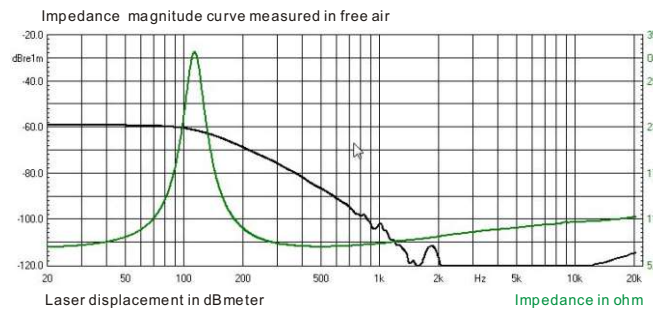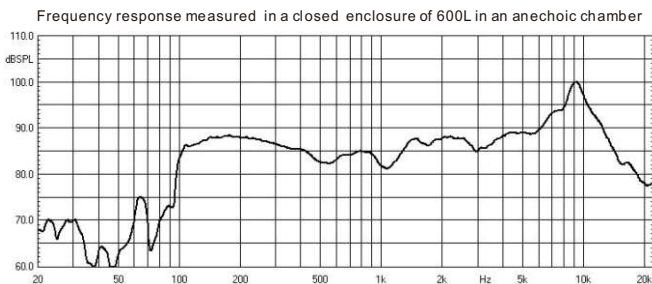

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system without preconditioning test at 23 Celsius degree environment.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.