

FR32Ind

- ☀ 3 inch
- ☀ 40 Watts
- ☀ 89 dB
- ☀ 115 ~ 15k Hz



KEY FEATURES:

- ① 80W continuous program power capacity
- ② 89dB sensitivity, 1w/1m
- ③ 20mm(0.8") high temperature copper clad aluminum voice coil
- ④ Vented voice coil former increases airflow to provide enhanced cooling
- ⑤ Strong and light fiberglass cone remains rigid to higher frequencies
- ⑥ High grade Neodymium magnet to lower weight
- ⑦ Ideal for compact array systems

GENERAL SPECIFICATIONS



| | |
|-------------------------------------|---------------|
| Nominal Diameter | 80mm /3inch |
| Rated Impedance | 8 ohm |
| Nominal Power handling ¹ | 40 Watts |
| Program Power ² | 80 Watts |
| Sensitivity(1w/1m) ³ | 89 dB |
| Frequency Range ⁴ | 115 ~ 15k Hz |
| Minimum Impedance(Zmin) | 7.3 ohm |
| Voice Coil Diameter | 20mm /0.8inch |
| Voice Coil Material | CCA W |
| Former Material | Glass Fiber |
| Voice Coil Winding Depth | 6 mm |
| Number of layers | 2 |
| Magnet gap depth | 4 mm |
| Basket | Pressed Cast |
| Flux Density | 1.4T |
| Magnet Material | Neodymium |

THIELE - SMALL PARAMETERS⁵

| | | |
|--|------|-----------------------|
| Resonance frequency | Fs | 118 Hz |
| DC resistance | Re | 6.4 ohm |
| Mechanical factor | Qms | 3.1 |
| Electrical factor | Qes | 0.56 |
| Total factor | Qts | 0.47 |
| Mechanical compliance of suspension losses | Cms | 0.61 mm/N |
| Effective Moving Mass | Mms | 2.9 g |
| Half-space efficiency | Eff | 0.3% |
| BL Factor | BL | 5 T.m |
| Equivalent Cas air load | Vas | 1.0 liters |
| Effective piston area | Sd | 0.0033 m ² |
| Max. linear excursion ⁶ | Xmax | 2 mm |
| Voice coil inductance | Le1K | 0.05 mH |
| Efficiency Bandwidth Product | EBP | 214 |

MOUNTING INFORMATION

| | |
|------------------------|--------------|
| Overall Diameter | 93 mm |
| Bolt Circle Diameter | 84 mm |
| Bolt Hole Diameter | 5 mm |
| Baffle Cutout Diameter | 71 mm |
| Overall Depth | 47 mm |
| Net Weight(1pc) | 0.22 kg |
| Shipping Weight(32pcs) | 8.7 kg |
| Shipping Box(32pcs) | 400*400*145m |

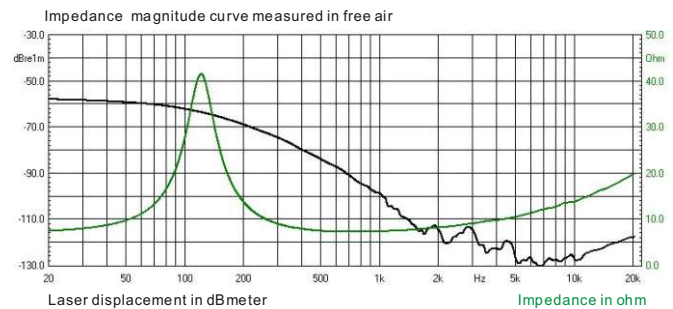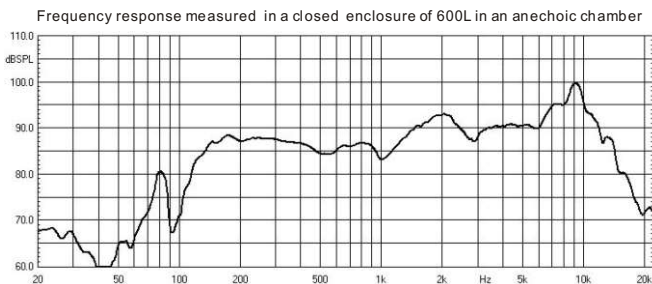

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system without preconditioning test at 23 Celsius degree environment.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.