

J6015

☀️ 15 inch ☀️ 650 Watts
☀️ 99 dB ☀️ 43 ~ 2800 Hz



KEY FEATURES:

- ① 1300 W continuous program power capacity
- ② Sensitivity: 99dB 1w/1m
- ③ 86mm (3.5") high temperature inside/outside voice coil with copper clad aluminum wire
- ④ Paper cone imported from U.S.A
- ⑤ Dual-forced hyper-venting and 10mm top plate for minimum power compression
- ⑥ M-roll surround and curved cone geometry
- ⑦ Ideal for high quality compact 2 or 3-way systems

GENERAL SPECIFICATIONS

Nominal Diameter	380mm /15inch
Rated Impedance	8 ohm
Nominal Power handling ¹	650 Watts
Program Power ²	1300 Watts
Sensitivity(1w/1m) ³	99 dB
Frequency Range ⁴	43 ~ 2800Hz
Minimum Impedance(Zmin)	6.8 ohm
Voice Coil Diameter	86mm /3.5inch
Voice Coil Material	CCA W
Former Material	Glass Fiber
Voice Coil Winding Depth	16.5 mm
Number of layers	2(inside/outside)
Magnet gap depth	10 mm
Basket	Cast Aluminum
Flux Density	1.15 T
Magnet Outer Diameter / Wgt	190mm / 95 oz

THIELE - SMALL PARAMETERS⁵


Resonance frequency	Fs	43 Hz
DC resistance	Re	5.6 ohm
Mechanical factor	Qms	7.0
Electrical factor	Qes	0.3
Total factor	Qts	0.29
Mechanical compliance of suspension losses	Cms	0.14 mm/N
Effective Moving Mass	Mms	99 g
Half-space efficiency	Eff	3.65%
BL Factor	BL	22 T.m
Equivalent Cas air load	Vas	145 liters
Effective piston area	Sd	0.0866 m ²
Max. linear excursion ⁶	Xmax	6 mm
Voice coil inductance	Le1K	1.5 mH
Efficiency Bandwidth Product	EBP	143

MOUNTING INFORMATION


Overall Diameter	393 mm
Bolt Circle Diameter	375 mm
Bolt Hole Diameter	6.5 mm
Baffle Cutout Diameter	355 mm
Overall Depth	172 mm
Net Weight	7.9 kg
Shipping Weight	8.6 kg
Shipping Box	425x425x2 15 mm



Frequency response measured in a closed enclosure of 600L in an anechoic chamber

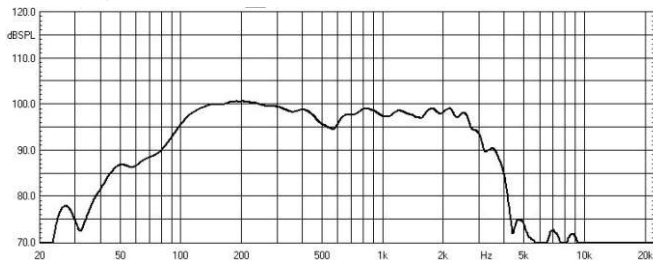

Impedance magnitude curve measured in free air

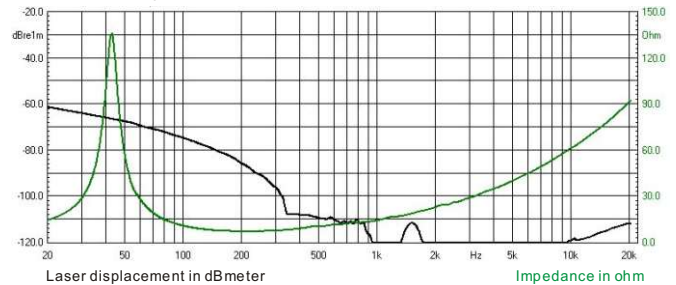

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system without preconditioning test at 23 Celsius degree environment.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.