

J6218 / 2



☀ 18 inch ☀ 1300 Watts
☀ 98 dB ☀ 40 ~ 1000 Hz



KEY FEATURES:

- ① 2600 W continuous program power capacity
- ② 98dB Sensitivity 1w/1m
- ③ 40Hz ~1000Hz frequency response range
- ④ 125mm(5") inside/outside voice coil for improved power-handling and durability
- ⑤ Separated dual spiders assembly has a stronger structure and high linearity of movement; aluminum spacer
- ⑥ FEA optimized magnetic circuit
- ⑦ Increased excursion and power handling over J6218
- ⑧ Ideal for high quality horn-loaded subwoofer systems

GENERAL SPECIFICATIONS

Nominal Diameter	460mm / 18inch
Rated Impedance	8 ohm
Nominal Power handling	1300 Watts
Program Power	2600 Watts
Sensitivity(1w/1m)	98 dB
Frequency Range	40 ~ 1000Hz
Minimum Impedance(Zmin)	6.9 ohm
Voice Coil Diameter	125mm / 5inch
Voice Coil Material	Copper
Former Material	Glass Fiber
Voice Coil Winding Depth	26 mm
Number of layers	2(inside/outside)
Magnet gap depth	14 mm
Basket	Cast Aluminum
Flux Density	1.16 T
Magnet Out Diameter/Wgt	280mm / 205 oz

THIELE - SMALL PARAMETERS⁵

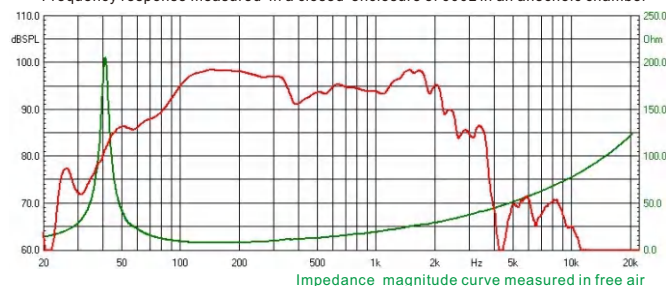
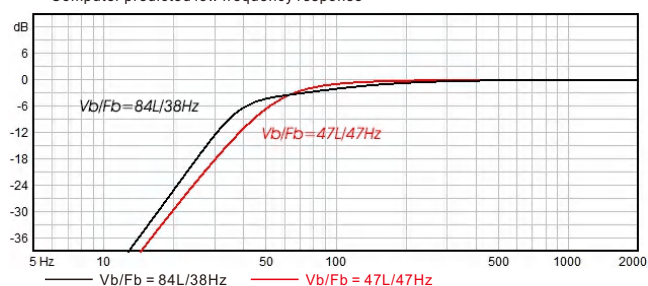
Resonance frequency	Fs	40 Hz
DC resistance	Re	5.5 ohm
Mechanical factor	Qms	21.2
Electrical factor	Qes	0.30
Total factor	Qts	0.30
Mechanical compliance	Cms	0.062mm/N
Mechanical resistance of total-driver losses	Rms	2.4 kg/s
Effective Moving Mass	Mms	252 g
Half-space efficiency	Eff	2.5 %
BL Factor	BL	34.0 T.m
Equivalent Cas air load	Vas	132 liters
Effective piston area	Sd	0.1225 m ²
Max. linear excursion ⁶	Xmax	±9.5mm
Max. excursion before damage	Xdam	±26 mm
Voice coil inductance(1kHz)	Le	1.7 mH
Efficiency Bandwidth Product	EBP	133

MOUNTING INFORMATION

Overall Diameter	461 mm
Bolt Circle Diameter	439 mm
Bolt Hole Diameter	6.5 mm
Baffle Cutout Diameter	424 mm
Overall Depth	217 mm
Air volume occupied by driver	11.9 liters
Net Weight	19.2 kg
Shipping Weight	20.7 kg
Shipping Box	490x490x245mm



Frequency response measured in a closed enclosure of 600L in an anechoic chamber

Computer predicted low frequency response⁽⁷⁾

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. Thiele-Small parameters are measured with Klippel DALPM module BEFORE preconditioning test.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2 + Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
7. Vb: Net internal volume of box after subtracting the volume of internal objects.