

M5118/2

Code:19122

☀️ 18 inch ☀️ 750 Watts
☀️ 97 dB ☀️ 36 ~ 1000 Hz



KEY FEATURES:

- ① 1500 W continuous program power capacity
- ② 97dB Sensitivity 1w/1m
- ③ 36Hz ~1000Hz frequency response range
- ④ 4" high temperature inside/outside copper voice coil
- ⑤ Vented back plate increases airflow to provide enhanced cooling
- ⑥ Both side waterproof cone treatment
- ⑦ Ideal for compact bass-reflex subwoofer application

GENERAL SPECIFICATIONS



Nominal Diameter	460mm / 18inch
Rated Impedance	8 ohm
Nominal Power handling ¹	750 Watts
Program Power ²	1500 Watts
Sensitivity(1w/1m) ³	97 dB
Frequency Range ⁴	36 ~ 1000Hz
Minimum Impedance(Zmin)	7.4 ohm
Voice Coil Diameter	100mm / 4inch
Voice Coil Material	Copper
Former Material	Glass Fiber
Voice Coil Winding Depth	25 mm
Number of layers	2(inside/outside)
Magnet gap depth	10.7 mm
Basket	Cast Aluminum
Flux Density	1.1 T
Magnet Out Diameter/Wgt	220mm / 125 oz

THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	36 Hz
DC resistance	Re	5.4 ohm
Mechanical factor	Qms	12.5
Electrical factor	Qes	0.33
Total factor	Qts	0.33
Mechanical compliance of suspension losses	Cms	0.09 m/N
Effective Moving Mass	Rms	3.76 mech-ohm
Half-space efficiency	Mms	208 g
BL Factor	Eff	2.4%
Equivalent Cas air load	BL	27.6 T.m
Effective piston area	Vas	180 liters
Max. linear excursion ⁶	Sd	0.1170 m ²
Voice coil inductance	Xmax	9.6 mm
Efficiency Bandwidth Product	Le1K	2.3 mH
	EBP	109

MOUNTING INFORMATION

Overall Diameter	461 mm
Bolt Circle Diameter	439 mm
Bolt Hole Diameter	6.5x9.5 mm
Baffle Cutout Diameter	424 mm
Overall Depth	200 mm
Net Weight	12.8 kg
Shipping Weight	14.3 kg
Shipping Box	500x500x240mm

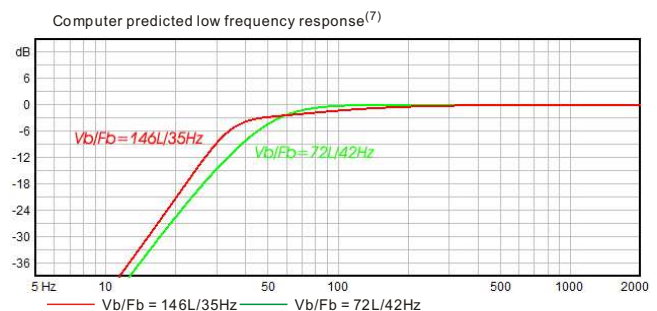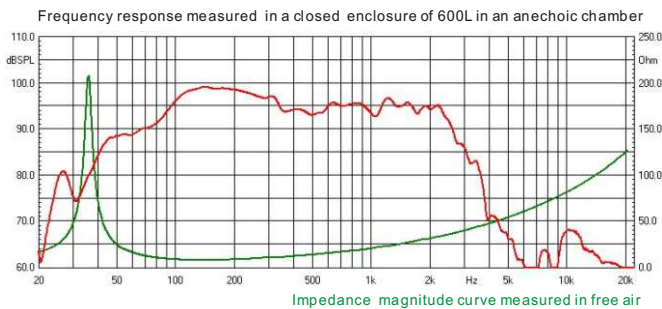

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters are measured with laser system after a high level 25Hz sine wave preconditioning test.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
7. Vb: Net internal volume of box after subtracting the volume of internal objects.