

M5118

☀ 18 inch ☀ 700 Watts
☀ 97 dB ☀ 36 ~ 1000 Hz



KEY FEATURES:

- ① 1400 W continuous program power capacity
- ② 97dB Sensitivity 1w/1m
- ③ 36Hz ~1000Hz frequency response range
- ④ 4" high temperature copper voice coil
- ⑤ Vented back plate increases airflow to provide enhanced cooling
- ⑥ Ideal for compact bass-reflex subwoofer application

GENERAL SPECIFICATIONS

Nominal Diameter	460mm / 18inch
Rated Impedance	8 ohm
Nominal Power handling ¹	700 Watts
Program Power ²	1400 Watts
Sensitivity(1w/1m) ³	97 dB
Frequency Range ⁴	36 ~ 1000Hz
Minimum Impedance(Zmin)	6.8 ohm
Voice Coil Diameter	100mm / 4inch
Voice Coil Material	Copper
Former Material	Glass Fiber
Voice Coil Winding Depth	22 mm
Number of layers	2
Magnet gap depth	10.7 mm
Basket	Cast Aluminum
Flux Density	1.1 T
Magnet Out Diameter/Wgt	220mm / 125 oz

THIELE - SMALL PARAMETERS⁵


Resonance frequency	Fs	39 Hz
DC resistance	Re	5.3 ohm
Mechanical factor	Qms	11
Electrical factor	Qes	0.41
Total factor	Qts	0.4
Mechanical compliance	Cms	0.08 m/N
of suspension losses	Rms	2.9 mech-ohm
Effective Moving Mass	Mms	203 g
Half-space efficiency	Eff	2.1%
BL Factor	BL	25.3 T.m
Equivalent Cas air load	Vas	158 liters
Effective piston area	Sd	0.1164 m ²
Max. linear excursion ⁶	Xmax	8 mm
Voice coil inductance	Le1K	2.0 mH
Efficiency Bandwidth Product	EBP	94

MOUNTING INFORMATION


Overall Diameter	461 mm
Bolt Circle Diameter	439 mm
Bolt Hole Diameter	6.5x9.5 mm
Baffle Cutout Diameter	424 mm
Overall Depth	200 mm
Net Weight	12.8 kg
Shipping Weight	13.8 kg
Shipping Box	500x500x250mm



Frequency response measured in a closed enclosure of 600L in an anechoic chamber

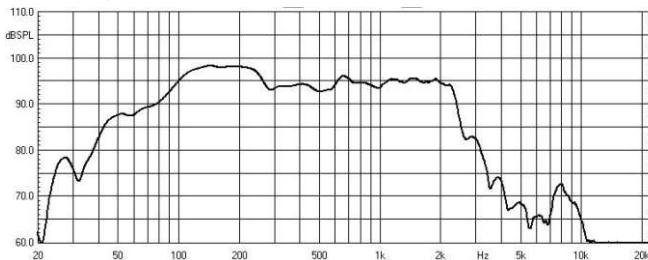

Impedance magnitude curve measured in free air

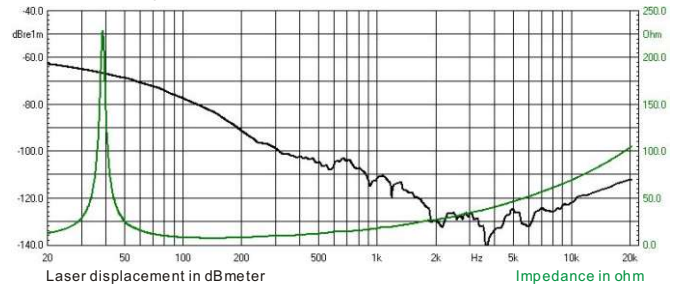

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system without preconditioning test at 23 Celsius degree environment.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.