

ND9015w

☀ 15 inch ☀ 500 Watts
☀ 99 dB ☀ 45 ~ 2900 Hz



KEY FEATURES:

- ① 1000 W continuous program power capacity
- ② 99dB sensitivity 1w/1m
- ③ 76mm(3") inside/outside winding copper clad aluminum voice coil
- ④ FEA optimized neodymium magnet assembly allows the highest force factor and excursion capability
- ⑤ Paper cone made in the USA
- ⑥ Optimized for the use in compact bass reflex enclosure or line array systems

GENERAL SPECIFICATIONS

Nominal Diameter	380mm /15inch
Rated Impedance	8 ohm
Nominal Power handling ¹	500 Watts
Program Power ²	1000 Watts
Sensitivity(1w/1m) ³	99 dB
Frequency Range ⁴	45 ~ 2900Hz
Minimum Impedance(Zmin)	6.7 ohm
Voice Coil Diameter	76mm /3inch
Voice Coil Material	CCAW
Former Material	Glassfiber
Voice Coil Winding Depth	17 mm
Number of layers	2(inside/outside)
Magnet gap depth	10 mm
Basket	Cast Aluminum
Flux Density	1.2 T
Magnet Material	Neodymium



THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	46 Hz
DC resistance	Re	5.3 ohm
Mechanical factor	Qms	10.4
Electrical factor	Qes	0.41
Total factor	Qts	0.39
Mechanical compliance	Cms	0.13 mm/N
Mechanical resistance of total-driver losses	Rms	2.6 kg/s
Effective Moving Mass	Mms	92 g
Half-space efficiency	Eff	3.4%
BL Factor	BL	18.7 T.m
Equivalent Cas air load	Vas	145 liters
Effective piston area	Sd	0.0903 m ²
Max. linear excursion ⁶	Xmax	± 6 mm
Max. excursion before damage	Xdam	±18mm
Voice coil inductance(1kHz)	Le	0.99 mH
Efficiency Bandwidth Product	EBP	112

MOUNTING INFORMATION

Overall Diameter	393 mm
Bolt Circle Diameter	275 mm
Bolt Hole Diameter	6.5 mm
Baffle Cutout Diameter	355 mm
Overall Depth	166 mm
Air volume occupied by driver	4.8 liters
Net Weight	5.5 kg
Shipping Weight	6.6 kg
Shipping Box	430x430x205mm

Also available in 16ohm, data upon request.

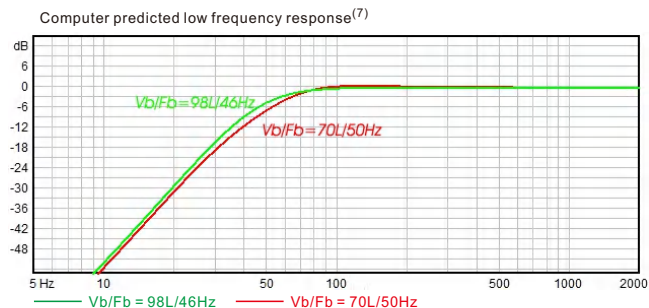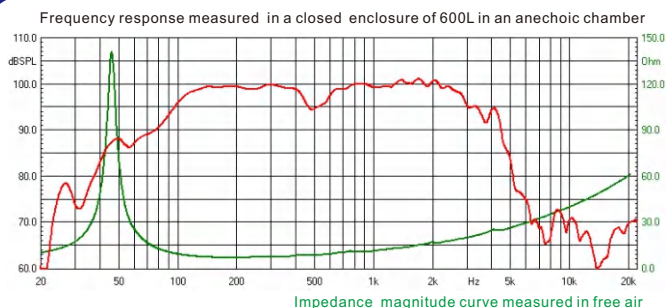

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system BEFORE preconditioning test.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
7. Vb: Net internal volume of box after subtracting the volume of internal objects.