

PA15-65 / 4ohm

- ☀ 15 inch ☀ 330 Watts
- ☀ 95.5 dB ☀ 38 ~ 3000 Hz



KEY FEATURES:

- ① 660 W continuous program power capacity
- ② 95.5dB Sensitivity 1w/1m
- ③ 38 ~ 3000Hz frequency response range
- ④ High temperature copper wire wounded on polyimide former
- ⑤ Long glassfiber impregnated cone to provide outstanding reliability and performance
- ⑥ Ideal for compact 2-way systems

GENERAL SPECIFICATIONS

Nominal Diameter	380mm /15inch
Rated Impedance	4 ohm
Nominal Power handling ¹	330 Watts
Program Power ²	660 Watts
Sensitivity(1w/1m) ³	95.5 dB
Frequency Range ⁴	38 ~ 3000Hz
Minimum Impedance(Zmin)	4.6 ohm
Voice Coil Diameter	65mm /2.5inch
Voice Coil Material	Copper
Former Material	Polyimide
Voice Coil Winding Depth	16 mm
Number of layers	2
Magnet gap depth	8 mm
Basket	Pressed Steel
Flux Density	1.06 T
Magnet Outer Diameter / Wgt	156mm / 50 oz



THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	38 Hz
DC resistance	Re	3.6 ohm
Mechanical factor	Qms	13.8
Electrical factor	Qes	0.49
Total factor	Qts	0.48
Mechanical compliance of suspension losses	Cms	0.17 mm/N
Effective Moving Mass	Mms	104 g
Half-space efficiency	Eff	1.8%
BL Factor	BL	13.4 T.m
Equivalent Cas air load	Vas	173 liters
Effective piston area	Sd	0.0855 m ²
Max. linear excursion ⁶	Xmax	6 mm
Voice coil inductance	Le1K	0.96 mH
Efficiency Bandwidth Product	EBP	78

MOUNTING INFORMATION

Overall Diameter	387 mm
Bolt Circle Diameter	373 mm
Bolt Hole Diameter	6.5 mm
Baffle Cutout Diameter	355 mm
Overall Depth	152 mm
Net Weight	4.5 kg
Shipping Weight	5.5 kg
Shipping Box	420x420x205mm

Also available in 8ohm, data upon request.

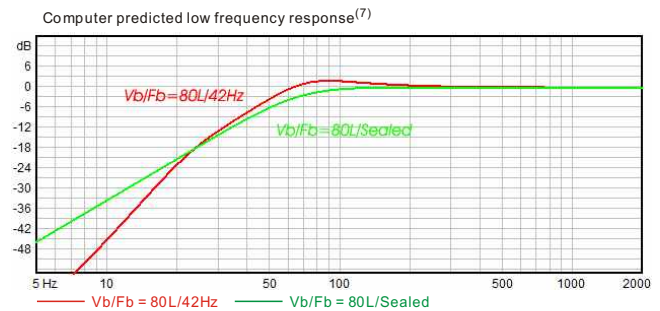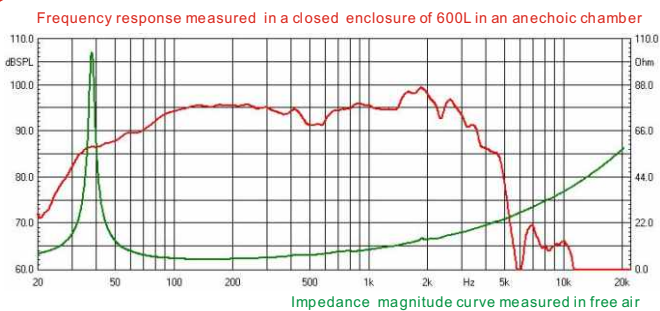

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system with a high level 25Hz sine wave preconditioning test.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.
7. Vb: Net internal volume of box after subtracting the volume of internal objects.