

V3006m/16

☀ 6.5 inch ☀ 100 Watts
☀ 92 dB ☀ 135 ~ 9000 Hz



KEY FEATURES:

- ① 200 W continuous program power capacity
- ② High sensitivity 92dB/1w/1m
- ③ Extended mid response up to 9kHz
- ④ 1.5" flat copper voice coil
- ⑤ Copper shorting ring ensures extreme linear impedance and reduced distortion figure
- ⑥ Ideal for the use in line array systems and midrange application

GENERAL SPECIFICATIONS

Nominal Diameter	170mm /6.5inch
Rated Impedance	16 ohm
Nominal Power handling ¹	100 Watts
Program Power ²	200 Watts
Sensitivity(1w/1m) ³	92 dB
Frequency Range ⁴	135 ~ 9000Hz
Minimum Impedance(Zmin)	14.1 ohm
Voice Coil Diameter	38mm /1.5inch
Voice Coil Material	Edgewound copper
Former Material	Fiberglass
Voice Coil Winding Depth	8 mm
Number of layers	1
Magnet gap depth	6 mm
Basket	Cast Aluminum
Flux Density	1.1T
Magnet Outer Diameter / Wgt	120mm / 30 oz



THIELE - SMALL PARAMETERS⁵

Resonance frequency	Fs	139 Hz
DC resistance	Re	12.6 ohm
Mechanical factor	Qms	7
Electrical factor	Qes	1.25
Total factor	Qts	1.1
Mechanical compliance of suspension losses	Cms	0.12 mm/N
Effective Moving Mass	Mms	10.5 g
Half-space efficiency	Eff	0.7%
BL Factor	BL	9.6 T.m
Equivalent Cas air load	Vas	3.3 liters
Effective piston area	Sd	0.0139 m ²
Max. linear excursion ⁶	Xmax	2.5 mm
Voice coil inductance	Le1K	0.21 mH
Efficiency Bandwidth Product	EBP	111

MOUNTING INFORMATION

Overall Diameter	162 mm
Bolt Circle Diameter	172 mm
Bolt Hole Diameter	5 mm
Baffle Cutout Diameter	147 mm
Overall Depth	78 mm
Net Weight	2.1 kg
Shipping Weight	2.3 kg
Shipping Box	172x172x95mm

Also available in 8ohm, data upon request.

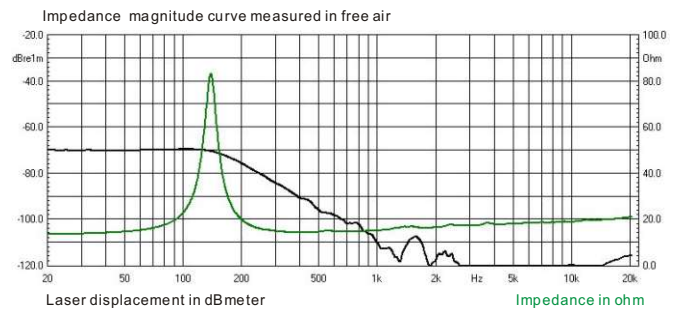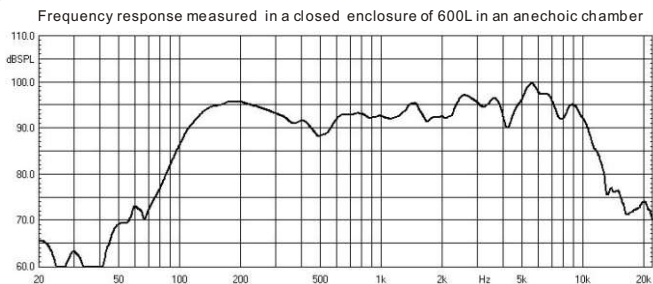

NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system without preconditioning test at 23 Celsius degree environment.
6. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.