

# V3010m/8

☀️ 10 inch ☀️ 300 Watts  
☀️ 97 dB ☀️ 55 ~ 4800 Hz



## KEY FEATURES:

- ① 600 W continuous program power capacity
- ② High sensitivity 97 dB/1w/1m
- ③ Very smooth response up to 4.8k Hz
- ④ 2.5" inside/outside copper clad aluminum voice coil
- ⑤ Aluminum demodulating ring for very low distortion
- ⑥ Ideal for mid and mid-bass high loading systems

## GENERAL SPECIFICATIONS

Nominal Diameter	250mm /10inch
Rated Impedance	8 ohm
Nominal Power handling <sup>1</sup>	300 Watts
Program Power <sup>2</sup>	600 Watts
Sensitivity(1w/1m) <sup>3</sup>	97 dB
Frequency Range <sup>4</sup>	55 ~ 4800Hz
Minimum Impedance(Zmin)	14.5 ohm
Voice Coil Diameter	65mm /2.5inch
Voice Coil Material	CCA W
Former Material	Fiberglass
Voice Coil Winding Depth	11 mm
Number of layers	2(inside/outside)
Magnet gap depth	8 mm
Basket	Cast Aluminum
Flux Density	1.3T
Magnet Outer Diameter / Wgt	170mm / 62 oz

## THIELE - SMALL PARAMETERS<sup>5</sup>

Resonance frequency	Fs	57 Hz
DC resistance	Re	5.0 ohm
Mechanical factor	Qms	8.9
Electrical factor	Qes	0.26
Total factor	Qts	0.25
Mechanical compliance	Cms	0.22 mm/N
of suspension losses	Rms	1.4 mech-ohm
Effective Moving Mass	Mms	39 g
Half-space efficiency	Eff	2.8%
BL Factor	BL	15.6 T.m
Equivalent Cas air load	Vas	39 liters
Effective piston area	Sd	0.0356 m <sup>2</sup>
Max. linear excursion <sup>6</sup>	Xmax	4 mm
Voice coil inductance	Le1K	0.41 mH
Efficiency Bandwidth Product	EBP	222


## MOUNTING INFORMATION

Overall Diameter	261 mm
Bolt Circle Diameter	246 mm
Bolt Hole Diameter	5.5 mm
Baffle Cutout Diameter	228 mm
Overall Depth	115 mm
Net Weight	5.0 kg
Shipping Weight	5.4 kg
Shipping Box	275x275x130mm


Also available in 16ohm, data upon request.



Frequency response measured in a closed enclosure of 600L in an anechoic chamber

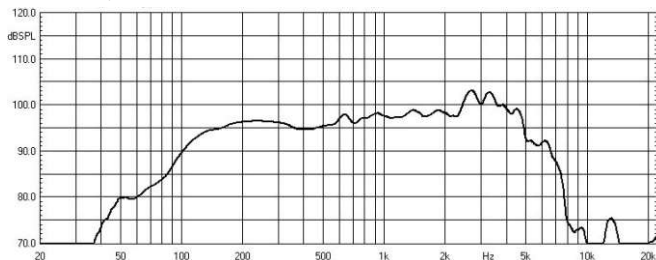

Impedance magnitude curve measured in free air

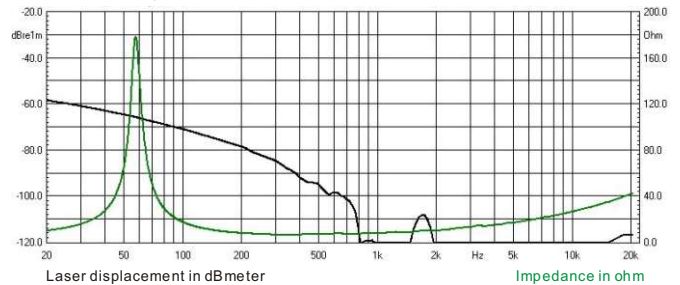

## NOTES:

1. AES standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. T/S parameters measured with laser system without preconditioning test at 23 Celsius degree environment.
6. The maximum linear excursion is calculated as:  $(Hvc-Hg)/2+Hg/4$  where Hvc is the voice coil depth and Hg is the gap depth.